



2X-F2-21

Addressable Fire Panel - 2 Loop - Portuguese, Portugal

Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial.

With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

The Panel

The fire panels supplied in local language, with user interface, with 2 loops that supports up to 256 devices in 512 zones, have standard 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

Options

The panel supports an extra 2 loop board that brings the panel to up to 256 zones with 4 additional programmable outputs. Add a network board to create a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire repeater panels up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or a 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for custom text.

Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



Details


- 2 loops expandable to 4 with up to 512 zones and 300 outputgroups
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizards and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Compatible with the new loop powered sounders/beacons and base sounders and the 2000 series detectors with replaceable optical chamber

2X-F2-21

Addressable Fire Panel - 2 Loop - Portuguese, Portugal

Technical specifications

Geral		Ambiental	
Maximum system capacity (device count)	up to 16384	Operating temperature	-8 to +42°C
Network size (nodes)	up to 64	Storage temperature	-10 to +50°C
Elétrica		Relative humidity	95% max. noncondensing
Power supply type	VAC	Environment	Indoor
Operating voltage	110/230 VAC (+10%/-15%) 50 / 60 Hz (±5%)	IP rating	IP30: for indoor use only
Current consumption	Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A 2 / 4 A (fuse rating)	Regulatory	
Loop		Compliance	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Maximum loop capacity	4	Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS
Type and rating	Recommended 2 core 1.5 mm ² twisted pair (cable)	Electrical	
Cable rating	52ohm / 500nF max. 2 km (length)	Mains supply cable type	3 x 1.5 mm ² (live, neutral, earth)
Outputs	250 mA / 29VDC (29VDC to 36VDC)	Output	
Zona		General Fire + Fault supervised	2, 350mA / 19.5-28VDC (24 VDC nominal)
Maximum zone capacity	up to 512		
Entrada			
Input type and rating	150 mA (max. load); Recommended 2 core 1.5 mm ² twisted pair (cable)		
Programmable	2		
Termination	15 kohm (EOL resistor)		
Saída			
Output type and rating	Recommended 2 core 1.5 mm ² twisted pair (cable)		
Fire alarm signalling	2 x General Fire + Fault relay		
Auxilliary power	1 resetable, 500mA / 19.5-28VDC (24VDC nominal)		
Programmable	4, 750mA / 19.5-28VDC (24VDC nominal) (supervised)		
Termination	15 kohm (EOL resistor)		
Bateria de standby			
Capacity	Max. 2 x 12V/18Ah (use supplied cables)		
Físico			
Form factor	Large		
Physical dimensions	450 x 550 x 171 mm (W x H x D)		
Net weight	7.4 kg (without battery)		
Shipping weight	10.1 kg		
Colour	Grey (RAL 7035)		
Mounting type	Surface mount		
Cable entries	18 (20mm) / 2 (20mm) / 2 removable plates (Top / Bottom / Back)		

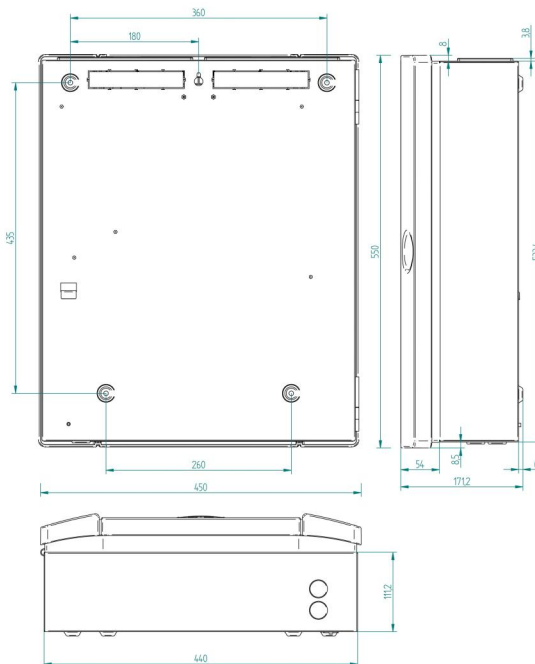

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 16 August 2022 - 11:25