

# 2010-2-PIB-80

## Addressable Fire Panel Accessory - Peripherals Interface Board 8 Outputs

### Overview

---

The 2010-2-PIB-80 Peripherals Interface Board is an accessory of the small to medium size intelligent addressable life safety control systems. In total there are 4 variants of this board. The 2010-2-PIB-80 is a reduced variant of the 2010-2-PIB and is perfect if your only looking for having additional supervised outputs to interface other electronic equipment on site.

### Functionality


---

The 2010-2-PIB-80 Peripherals Interface Board provides eight outputs for compatible control panels. The board can be powered from the control panel or from an external power supply, providing 24 VDC to each of the supervised outputs. Outputs are supervised for short circuit and open circuit faults.

### Mounting & Connections

---

The board can be plugged directly on the front of the main board inside the big size control panel variants on top of the new release 3 chassis. No additional wiring is required. You can use the pluggable connectors to make your connections to the field wiring. Connect an external power supply to the board directly to reduce the load of your system.

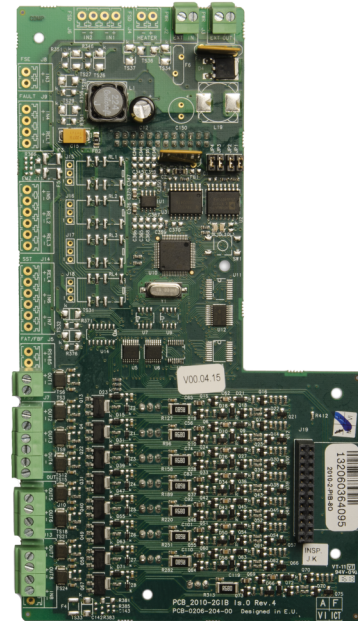

### Details

---

- 8 supervised outputs
- Option to externally power
- Pluggable connectors

# 2010-2-PIB-80

## Addressable Fire Panel Accessory - Peripherals Interface Board 8 Outputs

### Technical specifications

---

#### Geral

Compatibility	Release 3 hardware / firmware
---------------	-------------------------------

---

#### Elétrica

Power supply type	VDC
Operating voltage	24 VDC
Current consumption	40 mA max. (standby) 4050 mA max. (activated)

---

#### Saída

Output type and rating	500 mA at 25°C (activated) (per output)
------------------------	---

---

#### Físico

Form factor	Large
Physical dimensions	105 x 192 mm (W x H)
Net weight	126 g
Shipping weight	220 g
Mounting type	In cabinet

---

#### Ambiental

Operating temperature	+5 to +40°C
Storage temperature	-20 to +50°C
Relative humidity	10 to 95% noncondensing

---

#### Regulatory

Compliance	CPD, RoHS, WEEE
Certification	EN54-13, EN54-2

---

#### End-of-line termination

Output (typical)	EOL 15 kOhm, 1/4 W resistor
Output (EN 54-13)	EOL Class B (EN 54-13) device

---



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 16 August 2022 - 10:27