

**PROVISION ISR**<sup>®</sup>

*Now you can see!*

**PROVISION ISR**<sup>®</sup>  
*Now you can see!*



## Hidden Camera

- 1080P Pro 4 in 1 Series



## **Contents**

- 1) CAUTIONS
- 2) Product Introduction
  - 2.1 Camera Introduction
  - 2.2 Product Features
- 3) Menu Setup
- 4) Product Installation
  - 4.1 General Notes
  - 4.2 Installation Tools and Information
  - 4.3 Setting the Video Output Type
  - 4.4 Installation Method
  - 4.5 Connections
  - 4.6 OSD Control
- 5) Technical Specification

## 1 CAUTIONS

1. To avoid the risk of electric shock, do not open or maintain the machine by yourself, please consult a professional.
2. To prevent fire or shock, use the power after safety certification. the input voltage, current, voltage polarity and operating temperatures must meet the requirements of this camera.
3. Please note the operating temperature and environmental requirements of the camera, avoid too low or too high temperatures. General operating temperature range of  $-10^{\circ}\text{C} \sim +50^{\circ}\text{C}$  (Fahrenheit temperature is  $14^{\circ}\text{F} \sim 122^{\circ}\text{F}$ ). Avoid flooding and rain, minimize dust and moisture erosion; otherwise camera would be damaged.
4. Cameras in use should avoid direct sunlight, glare, otherwise the sensor will be damaged.
5. Do not touch the sensor surface. If any foreign objects are visible, use a cotton swab or lens cleaner to wipe it, if it is difficult to remove, a neutral detergent diluted with water would be useful. Do not use corrosive solution.

6. In order to make the camera work smoothly and obtain a satisfactory image, the power cord and video connection can not be too long. Otherwise, the increase of line loss will lead to inadequate operating voltage of the camera or inadequate video signal.
7. To prevent camera damage and personal injury, do not place camera on unstable objects, brackets, or bases.
8. Do not place camera near a radiator or other heating devices.

## 2 Product Introduction

### 2.1 Camera Introduction

PROVISION-ISR's new series of cameras have adopted a high performance CMOS image sensor which provides HD resolution and supports high resolution video output. The cameras support video transmission distance of around 400M base on Rg59 standard coaxial cable. This series can support AHD/TVI/CVI/CVBS 960H analog output.

### 2.2 Product Features

- Coaxial cable with BNC connector
- DIP Switch
- Auto Day/Night (ICR)
- Auto Defog, HBLC, BLC
- Digital WDR, 2D/3D NR
- Motion Detection, Privacy Mask
- AHD/TVI/CVI/CVBS Signal Selectable
- PAL/NTSC (System Selectable by DIP switch)

## 3 Menu Setup

**AHD/TVI:** Click on "Iris+" button from the DVR's PTZ interface to call the OSD Menu. Use the PTZ interface to scroll through the menu and "Iris+" to confirm.

**CVI:** Click "▶" button from the DVR's PTZ interface, then click "☺" and press "Enter" to call the OSD Menu.

## 4 Product Installation

### 4.1 General Notes

1. Make sure the unit is powered off before installation.
2. Check if power supply voltage is consistent with electric voltage to prevent damages to the device.
3. Do not use in environments exceeding temperature limitations, and maintain good ventilation to prevent risk of fire or electric shock.
4. The installation and maintenance of this product should be professional, please do not in any way remove or modify the equipment; only use the


required accessories from the manufacturers. Issues caused by unauthorized repair are your responsibility.

## 4.2 Installation Tools and Information

Prepare the required engineering data and instructions. Before installing please prepare the following tools and instrumentation: A straight or a Phillips-head screwdriver, multi-meter, scissors, needle nose pliers, tape measure, pencil.

## 4.3 Setting the Video Output Type

The camera supports AHD/TVI/CVI/CBVS video output. Choosing the output type is done by setting a DIP switch on the cable as illustrated:



## 4.4 Installation Method

1. Check if all equipment is in tact.
2. Mounting bracket or base:

- If you are installing on a cement wall, use the expansion screw holes and then mount the bracket or base.
- If you are installing on a wooden wall, use the self-tapping screws to mount

### 3. Mounting the camera

#### a. Dome Camera

Adjust the lens position to aim at the monitoring points and present a clear picture. Manually fix lens location and adjust the hemisphere cover. Re-examine the screen whether the character meets your requirements. Tighten the hemisphere cover.

#### b. Bullet Camera

Adjust the body so the lens aim at the monitoring points and presents a clear picture. Tighten the screws to ensure camera will not move.


Installation method above is for reference only.

### **Note:**

**The wall needs to bear at least 3 times the weight of bracket and camera.**

## 4.5 Connections

Connection as show in the figure below

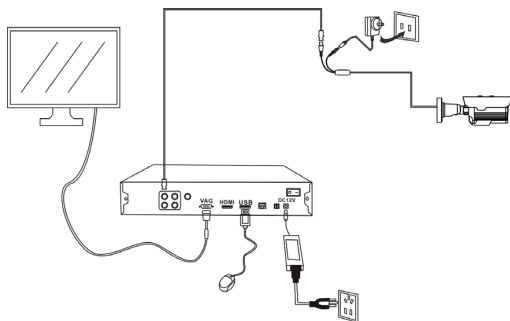

## 4.6 OSD Control

The OSD control is available by CoC (Control over Coax) only. If your AHD/TVI/CVI DVR supports this function\*, use the DVR's PTZ interface to press on "Iris+" or "Iris-" to open the OSD menu.

Navigate through the OSD menu using the PTZ direction arrows.

\* Notice: CoC function works no more than 200M by Rg59 coaxial cable

\* All of Provision-ISR's DVRs support CoC Starting from version 3.4.4

## OSD Menu List

Main Menu	Second Menu		Third Menu		
LENS	DC	Indoor			
		Outdoor	↓	MIN_SHU MAX_SHU	
	Manual				
EXPOSURE	↓	SHUTTER	AUTO 1/25s- 1/50000s X2-X30		
		AGC	0-15		
		SENS-UP	AUTO	SENS-UP	x2-x30
		BRIGHTNESS	1-100		
		D-DWR	OFF		
			AUTO		
			ON		
		DEFOG	OFF		
AUTO	POS/SIZE GRADATION DEFAULT				

BACKLIGHT	OFF				
	BLC	LEVEL			
		AREA			
		DEFAULT			
	HSBLC	SELECT	AREA1-4		
		DISPLAY	OFF		
			ON	POS/SIZE	
		BLACK MASK	ON/OFF		
		LEVEL	1-100		
		MODE	ALL DAY		
NIGHT			AGC LEVEL	0-255	
DEFAULT					
WHITE BAL	ATW				
	AWB				
	MANUAL	BLUE	1-100		
		RED	1-100		
	OUTDOOR				
	INDOOR				
	AWC-SET				
DAY/NIGHT	AUTO				
	COLOR				
	B/W				
	EXT	↓	D-N(DELAY)	0-60	
		N-D(DELAY)	0-60		

NR	↓	2DNR	LOW/MID/ HIGH			
		3DNR	LOW/MID/ HIGH			
SPECIAL	↓	CAM TITLE				
		D-EFFECT	↓		FREEZE	
					MIRROR	OFF
					ROTATION	
					V-FLIP	
					MIRROR	
			NEG IMAGE			
		MOTION	SELECT	AREA1-4		
			DISPLAY	ON/OFF		
			SENSITIVITY	0-100		
		PRIVACY	ALARM	ON/OFF		
			SELECT	AREA1-4		
			COLOR	W/R/B/G		
		LANGUAGE		12 choices		
		DEFECT	↓		WHITE	ON/OFF
	BLACK			ON/OFF		
RS485						
ADJUST	↓	SHARPNESS	↓	LEVEL	1-10	
				VALUE	0-255	
		VIDEO OUT		PAL/NTSC		
		Monitor		CRT/LCD and LSC		
EXIT		SAVE&END				

## Specifications:

### 4 in 1 Pro Hidden camera (1080P)

MC-392A37 / DL-392A37

Model	MC-392A37	DL-392A37
Image Sensor	1/3" 2.0MP Sensor	
Effective Pixels	1984(H)×1225(V)	
Scanning System	Progressive	
Resolution	Digital:1920×1080P, Analog:960H	
Min. Illumination	0.01Lux	
Day & Night	EXT, Color, B&W, AUTO	
IR LED	N/A	N/A
OSD Menu	Available by CoC Only	
Backlight Compensation	OFF/BLC/HSBLC	
S/N Ratio	≥60dB (AGC Off)	
White Balance	AWB, ATW, AWC (Push), Indoor, Outdoor, Manual	
Noise Reduce	3D-DNR (For Analog HD), 2D-DNR (For Analog)	
Video Output	AHD/TVI/CVI/CVBS (Signal Selectable by DIP switch)	
System Format	PAL/NTSC(System Selectable by DIP switch)	
Defog	Off/On	
Privacy Mask	Off/On (4 Areas)	
Motion Detection	Off/On (4 Areas)	
D-Effect	Freeze, Mirror, Negative Image	
Lens	3.7mm Pinhole	
Power	DC12V±10%, ~72mA	
Operation temp.	-10°C~+50°C (14°F~122°F)	
Dimension	35*35*10mm	Ø90*55mm
Net Weight	90g	210g

DS-392A37 / MW-392A37 / IV-390A37

Model	DS-392A37	MW-392A37	IV-390A37
Image Sensor	1/3" 2.0MP Sensor		
Effective Pixels	1984(H)×1225(V)		
Scanning System	Progressive		
Resolution	Digital:1920×1080P, Analog:960H		
Min. Illumination	0.01Lux	0.01Lux	0Lux (IR On)
Day & Night	EXT, Color, B&W, AUTO		
IR LED	N/A	N/A	18pcs(10m)
OSD Menu	Available by CoC Only		
Backlight Compensation	OFF/BLC/HSBLC		
S/N Ratio	≥60dB (AGC Off)		
White Balance	AWB, ATW, AWC (Push), Indoor, Outdoor, Manual		
Noise Reduce	3D-DNR (For Analog HD), 2D-DNR (For Analog)		
Video Output	AHD/TVI/CVI/CVBS (Signal Selectable by DIP switch)		
System Format	PAL/NTSC(System Selectable by DIP switch)		
Defog	Off/On		
Privacy Mask	Off/On (4 Areas)		
Motion Detection	Off/On (4 Areas)		
D-Effect	Freeze, Mirror, Negative Image		
Lens	3.7mm Pinhole		
Power	DC12V±10%, ~72mA	DC12V±10%, ~72mA	DC12V±10%, ~212mA
Operation temp.	-10°C~+50°C (14°F~122°F)		
Dimension	Ø125x50mm	14.5x14.5x9.5mm	104*60*66mm
Net Weight	85g	85g	94g