



ZP2-FR-C-21

Addressable Fire Panel Repeater - Compact - Portuguese, Portugal

Overview

The ZP2 Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive light blue inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial.

With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

The Compact Repeater


The compact repeater supplied in local language come with a network facility already assembled (no network board required). Except for having no addressable loops and corresponding programmable outputs, the setup is similar as a normal fire panel. It has by default 2 conventional relay output, 2 supervised inputs, 1 RS232, 2 USB and 1 Ethernet port. The repeater has no mains voltage power supply unit, but it allows for redundant 24VDC supply connections. For future use and expansions there is also already a repeater bus incorporated. The compact repeater is very easy to mount via the DIN-rail mounting option.

Options

The repeaters use a node on the network, similar like a normal panel with a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). In case more nodes on the network are required you can expand the network capabilities with an optional panel activation key. For the RS232 connection you can order the 2010-2-232-KIT, which includes a RS232 isolator board.

Approvals & Compliance

- CE / CPD
- BS5839-1 compliant
- WEEE / RoHS compliant

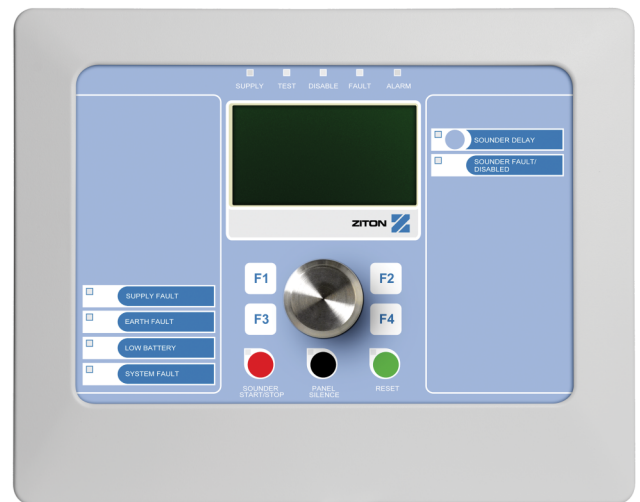

Details

- Local or global repeater with or without global control functionality
- Auto configuration, setup wizards and default EN54 setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable cover and chassis for quick and clean installation
- All pluggable connectors
- 2 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Redundant 24VDC supply
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- DIN-rail mounting

ZP2-FR-C-21

Addressable Fire Panel Repeater - Compact - Portuguese, Portugal

Technical specifications

General

Network size (nodes)	up to 64
----------------------	----------

Physical

Form factor	Compact
Physical dimensions	300 x 240 x 61 mm (W x H x D)
Net weight	2 kg
Shipping weight	2.3 kg
Colour	Pure white (RAL 9010)
Mounting type	Surface mount
Cable entries	6 / 4 / 6 (20mm) (Top/Bottom/Back)

Environmental

Operating temperature	-5 to +40°C
Storage temperature	-20 to +50°C
Relative humidity	95% max. noncondensing
Environment	Indoor
IP rating	IP30: for indoor use only (DIN rail mounting only)

Supply


Nominal	24VDC
Minimum	20VDC
Maximum	30VDC
Typical current	190 mA at 24 VDC
Cable type	2 x 1.5 mm ²

Relay outputs

Type	Potential free, NO/NC/C
Maximum output current	2 A / 30 VDC

Inputs

Programmable	2
Cable type	Recommended 2 core 1.5 mm ² twisted pair
End of Line resistor	15kohm

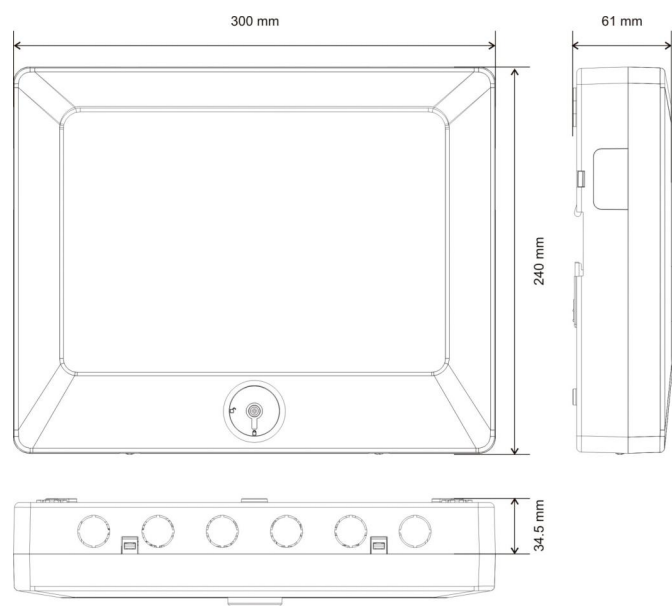

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 16 August 2022 - 15:10