

# 201301

## A51E-1 HIGH VOLTAGE RELAY

### General

The A51E is an addressable relay providing double pole, volt free, change-over contacts, rated to switch local mains supplies. The unit is intended for installation within the equipment to be switched, thereby offering savings in installation costs when compared to long, auxiliary circuit, wiring runs out from the control panel. Certified to EN54-18, the relay can be located anywhere on the two core ZP loop and is designed for power up or shut down of the mains electrical supply to ancillary equipment. The unit is ideal for the control of associated system equipment such as mains fed magnetic door release circuits, extract fans and dampers.

### Configuration and programming

The relay can be programmed to be activated by any single device, groups of devices or all system devices. All types of system input signals can be arranged to operate the A51E, which can include control panel indicators, zonal outputs, call points or detectors. Both normally closed relay connections (opening on alarm), and normally open relay connections (closing on alarm) are provided.

Housed in a low profile moulding, the relay is designed to clip directly onto a standard DIN 35 mounting rail or equipment panel chassis. Alternatively the relay can be installed in a SMB-DIN1 box (one unit capacity) or SMB-DIN2 box (two unit capacity) – care should be taken to prohibit casual entry into the enclosure.

Installed as part of an analogue addressable system, up to 127 line devices (detectors, call points or interface units) can be connected to each of the control panel loops. All loop devices incorporate switch settings enabling them to be assigned a unique address which is polled by the panel every two seconds.

### LED indication

A red LED indicator positioned on the front moulding flashes when the interface contacts have activated. For system test and commissioning the relay contacts can be operated manually, enabling control circuits to be tested.



### Details

- Addressable mains rated unit
- Miniature size
- DIN35 mounting rail fixing
- Loop wired - adjacent or internal to equipment to be switched
- Operated from any combination of input addresses
- Double pole, volt free change over contacts
- Approved to EN54 Part 18, CPR certified

# 201301

## A51E-1 HIGH VOLTAGE RELAY

### Especificaciones técnicas

#### General

Indicación de estado	LED (red) flashing on operation
Compatibilidad	All ZP addressable panels

#### Eléctrico

Voltaje de funcionamiento	pulsed ZP Loop 19.5 to 20.5 V
Consumo de corriente	600 µA (quiescent) 700 µA (alarm)

#### Físico

Dimensiones físicas	85 x 80 x 42 mm (W x H x D)
Peso neto	88 g
Color	Blanco
Tipo de Montaje	Carril DIN
Material	ABS moldeado

#### Medioambiental

Temperatura de funcionamiento	-10 to +55°C
Humedad relativa	10 to 95% noncondensing (at 40°C)
Entorno	Interior
Clasificación IP	IP20 (EN60529 rating)

#### Regulador

Certificación	CPR, EN54-18
---------------	--------------

#### Wiring

Two core loop
---------------

#### Relay contacts

Relay contacts: double pole change over
-----------------------------------------

#### Contact ratings


DC	1 A @ 60 VDC
AC	5 A @ 250 VAC

#### EMC

CE marked (EEC89/336)
-----------------------

#### Productos compatibles

Categoría	Referencia	Descripción
Unidad de interfaz	SMB-DIN1	Caja para módulos DIN.
Unidad de interfaz	SMB-DIN2	Caja para módulos DIN.

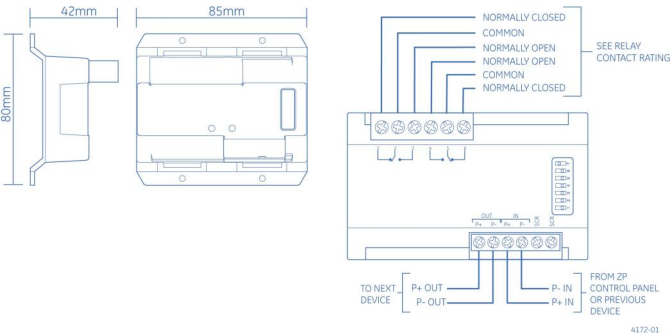

4172-01



Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de [es.firesecurityproducts.com](http://es.firesecurityproducts.com) o póngase en contacto con su comercial.

Last updated on 13 August 2024 - 7:34