

ASC366

Sirene Vermelha de Teto com Alarme Visual EN54, Base Baixo Perfil - Convencional

General

The ASC366 is a RED, general purpose, ceiling mount, electronic sounder and beacon for fire alarm applications. It features a special base containing all wiring connections allowing for easy placement or removal of the device. With an EN54-23 approved coverage pattern of C-3-8.9 for the beacon, each ASC366 may be mounted up to 3m high and provide a 8.9m cylinder diameter coverage. A room size of 6.3 x 6.3m square room may therefore be covered with a single device.

Easy and Fast Installation

The ASx360 series alarm sounder/beacons allow faster installation and maintenance thanks to an innovative mounting base. Dispensing with the need for locking screws these devices use TimeSaver™ bases from the 630 series detector lines. Heads are simply locked onto the base with a “twist and click” action, allowing fitting or removal at any time because the base is the only component that needs to be wired. As the cabling requirement is reduced, commissioning time and costs are naturally reduced as well.

Efficient and versatile

The ASx360 series sounders provide high sound output at a low current, thus reducing power requirements and system cost. They are supplied with a volume control as standard, allowing final audio adjustments to be made during installation. With a choice of 32 different tones (see tones table in manual), which are switch selectable, the required tone can be selected during installation.

The ASx360 series beacons utilise a specially designed lens giving a uniformed light output over the specified coverage area.

The mechanism for locking the device to the base may be activated if required. Once activated, a special tool is required to remove the sounder from the base.



Detalhes

- High sound output with Pulse Alert™ technology
- 32 Tones user selectable
- Automatic synchronisation
- Volume control and adjustable flash rate
- Anti-Tamper locking mechanism
- Shallow mouting base with wiring to the base
- Seperate sounder and beacon and control
- EN54:3 and EN54:23 approved, CPR Certified

ASC366

Sirene Vermelha de Teto com Alarme Visual EN54, Base Baixo Perfil - Convencional

Especificações técnicas

Geral

Monitorização de linha Polarised input

Elétrica

Tensão de operação 17 to 60 VDC

Consumo de corrente 5.1 mA (Sounder)

20 mA @ 0.5 Hz, 40 mA @ 1 Hz (Beacon)

Sirene

Nível de saída 85 to 97 dB(A) @ 1 m (tone dependant)
Continuous operation

Tons selecionáveis 32

Sincronização Automatic, Phased start

DAV

Cor Red

Cobertura do piso up to 8.9 m diameter

Físico

Dimensões físicas 100 x 94 (Ø x D)

Peso líquido 215 g

Cor Vermelho

Tipo de montagem Montagem de teto

Altura de montagem up to 3 m

Material Alto impacto policarbonato

Ambiental

Temperatura de operação -25 to +70°C

Humidade relativa 5 to 95% noncondensing

Ambiente Interior

Classificação IP IP21

Regulamentação

Certificação EN54-23, EN54-3


EN54-23 rating

Light coverage C-3-8.9

Produtos compatíveis

Categoria	Referência	Descrição
Dispositivo notificação	ASC366W	Sirene Branca de Teto com Alarme Visual EN54, Base Baixo Perfil - Convencional
Dispositivo notificação	ASC367	Sirene Vermelha de Teto com Alarme Visual EN54, Base Alta - Convencional

EN54-23 Coverage: C-3-8.9

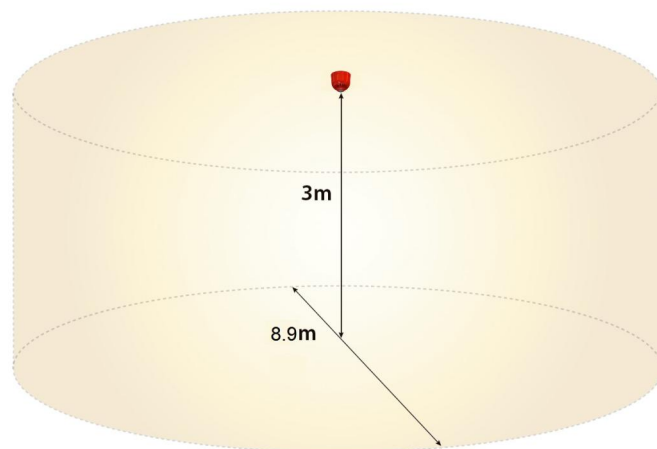

Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 13 September 2024 - 13:51