

# ATS1745

## Interface BUS para TCP/IP - ATS

### Connect ATS devices over your local network


Save time and money installing ATS systems with the new ATS1745 IP LAN Adaptor. The ATS1745 modules allow ATS RS-485 LAN data to be carried over a local IP network. This provides an IP connection between an ATS Master or ATS Advanced panel and its LAN devices such as readers and keypads (RAS/RKP), expanders including Intelligent Door/Lift Controllers (DGP/EXP) reducing the need for dedicated wiring of two-pair twisted cable (WCAT52 or WCAT54). The ATS1745 also enables physically separate segments of the ATS RS-485 LAN to be linked together over a local IP network, either to extend distance or inexpensively utilize existing IT infrastructure. It is perfect for connecting a panel to a remotely located RAS, DGP or Door/Lift Controller where it is costly to run cable but where IP connections are readily available (subject to network performance requirements).

ATS1745 modules provide securely-encrypted IP communications via a unique 128-bit encryption key.

ATS1745 modules are configured as either the Start of Line Module (SLM) or an End-of-Line Module (ELM). The SLM connects to the ATS panel while the ELMs provide IP links for all of a ATS Master or ATS Advanced system's LAN devices.

An SLM can support up to 31 ELMs to include 15 DGPs and 16 RASs per panel LAN bus connection. The ATS1745 can be configured easily and conveniently over the IP network via a Web browser.

Note: For proper security the Ethernet devices between SLM and ELM may need separate protection and back-up power.

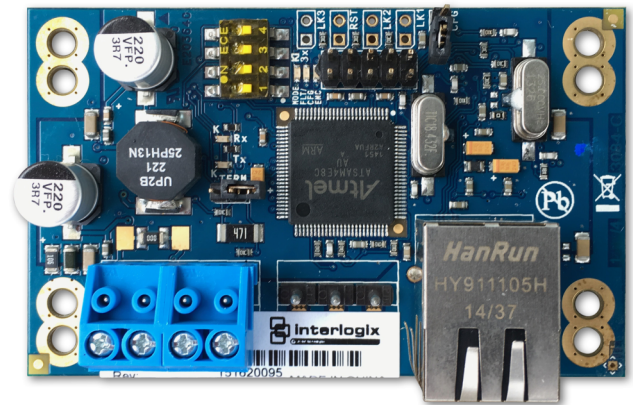

### Details

- ATS 485 Bus device
- Connects two or more ATS devices over a local IP connection
- Supported on ATS Master and ATS Advanced MR3 and later
- 128 bit AES secure data communication
- Easy configuration using built-in web server
- Up to 31 End-Of-Line modules connected over IP to 1 Start-Of-Line module
- Device configurable as Start-Of-Line or End-Of-Line module
- Network Test Tools allows to check network latency and suitability

# ATS1745

## Interface BUS para TCP/IP - ATS

### Technical specifications

---

#### Geral

Accessory group	Dispositivos de comunicação
Type	Interface

#### Elétrico

Tipo de fonte de alimentação	12 VDC
Tensão de operação	13.8 VDC supplied by the panel
Consumo de corrente	110 mA

#### Físico

Dimensões físicas	50 x 80 x 20 mm
Peso líquido	31 g

#### Ambiental

Temperatura de operação	0 to 40°C
Humidade relativa	93 %
Ambiente	Interior

#### Regulatory

Conformidade	CE
--------------	----



Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite [pt.firesecurityproducts.com](http://pt.firesecurityproducts.com) online ou contate o departamento comercial.

Last updated on 12 August 2022 - 10:56