


ATS626

Expansor Plug-In 16 Saídas OC- ATSx500

Sixteen way plug-in output expander

The ATS626 offers a sixteen way output expansion to Advisor Advanced panels. To reduce required space in the Main control panel housing, the unit is a plug-in to the Main Control panel PCB.

The ATS626 provides for eight Open Collector outputs available through screw terminals, one being a high-current output. In addition it provides for eight open collector outputs through flying leads or as a relay when using ATS1810 four way relay cards. The output function is defined through the output configuration in the main control panel.

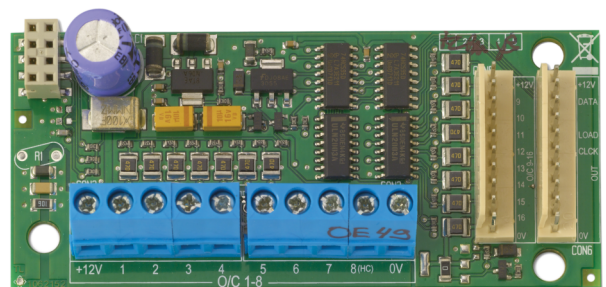

Details

- Expand Advisor Advanced panel with eight open collector outputs on the PCB
- Expand with max eight relay outputs using 2 x ATS1810 four way relay card
- 1 high current output (1A)
- Open collector output max 50 mA
- Plug-in to Advisor Advanced panels

ATS626

Expansor Plug-In 16 Saídas OC- ATSx500

Technical specifications

Geral

Tipo de expansor	Expansor de saídas
Linha de produto	Advisor Advanced
Connection type	Plug-in
Distância máx. do painel	Located on Advisor Advanced PCB
Máx. por painel	1

Saídas

Total	16
Incorporadas	8
Expansível	8 (2x ATS1810)
Tipo de saídas	Open collector

Elétrica

Tensão de operação	10.5 to 13.8 VDC
Consumo de corrente	50 mA (Low current OC) 1 A (High current OC)

Físico

Dimensões físicas	90 x 40 mm
-------------------	------------

Ambiental

Temperatura de operação	0 to +50°C
Humidade relativa	95% noncondensing
Ambiente	EN50130-5 ; Class II - Indoor (General)

Regulatory

Conformidade	CE
Certificação	CE, EN50131 Grau 3, VdS



Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 August 2022 - 11:23