


CODE: **AWO005EI v.1.0**
 NAME: **7/EI20/SATEL**

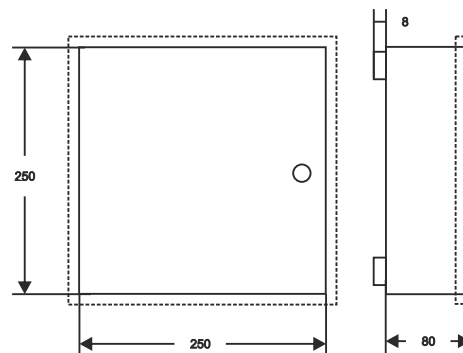

DESTINATION

SATEL: CA 4V1, CA5, CA6, VERSA 5,10, INTEGRA 24

MODULES: CA-64 (PP, EPS, ADR, O-R, O- ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VMG-16, SR, PTSA, ACC-KP-PS)

TECHNICAL DATA

Dimensions:	internal: W=250, H=250, D=80 external: W1=255, H1=255, D1=88mm [mm, +/-2]
Weight net/gross:	1,90kg / 2,05kg [+/-0,1kg]
Battery space:	7Ah/12V Sealed Lead Acid (SLA)
Transformer:	EI 20VA/18V
Primary winding	
fuse transformer:	T200mA
Power supply:	230V/AC (-15%/+10%), 50Hz, 120mA (max.)
Power supply output:	U1=18V/AC (-5%, +15%), I1=1,0A (max.)
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting source) - 8mm, easy door removal
Certification, declaration:	CE, RoHS