


CODE: **AWO256** v.1.9/IV
 NAME: **17/TRP50/SATEL**

EN

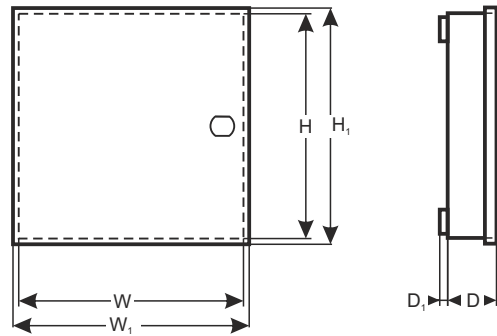

DESTINATION

SATEL:

- 1). CA6,10, VERSA 5,10,15, INTEGRA 24,32 + 4x CA10E (CA64E, SM, MST1)
- 2). CA6,10, VERSA 5,10,15, INTEGRA 24, 32 + 3 x CA10E (CA64E, SM, MST1) + CA64 (EPS, O-OC, O- ROC, O-R, VGM- 16, SR, ADR, ACC-KP-PS)
- 3). CA 6, 10, VERSA 5,10,15, INTEGRA 24, 32 + CA64 (E, SM, MST1) + 2 x CA64 (EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC- KP- PS)
- 4). INTEGRA 64, 128 + 3 x CA64E (CA10E, SM, MST1)
- 5). INTEGRA 64, 128 + CA64E (CA10E, SM, MST1) + CA64 (EPS, O- OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC- KP- PS)

MODULES:

- 1). CA64 (PP, OPS- OC, OPS-R, OPS- ROC, EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC-KP-PS) + 4 x CA64E (CA10E, SM, MST1)
- 2). CA64 (PP, OPS-OC, OPS-R, OPS-ROC) + CA64 (EPS, O-OC, O-ROC, O-R, VGM16, SR, ADR, ACC- KP-PS) + 3 x CA6 (CA10E, SM, MST1)
- 3). 2 x CA64 (EPS, O-OC, O-ROC, O-R, VGM- 16, SR, ADR, ACC- KP-PS) + 3 x CA64E (CA10E, SM, MST1)

TECHNICAL DATA

External dimensions of the enclosure:	W=320, H=400, D+D1=90+8 [+/-2 mm]
External dimensions of the front panel:	W1=325, H1=405 [+/-2 mm]
Battery space:	17Ah/12 V Sealed Lead Acid (SLA)
Weight net/gross:	3,52 / 3,80 [kg]
Transformer:	TRP 50 VA/16 V/18 V/20 V in the case of PC/ABC in class UL94-V0, IP30
Power supply:	230 V AC (-15%/+10%), 50Hz, 250mA (max.)
Power supply output:	U1=16 V AC or U2=18 V AC or U3=20 V AC (-5%,+15%),I1=3,0 A or I2=2,8 A or I3=2,5 A (max.)
Operating environment:	class II, -10°C+40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5 A@50 V DC max. NC - normally closed contacts
Closing:	sheet-metal screws x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm
Declaration, warranty:	CE, 2 year from the production date