

# ATS1340

## Caixa de Junção para Portas

### Product overview

---

The ATS1340 is designed as a universal door junction box. The module has an incoming and outgoing data bus / power connection to achieve a proper star connection for an Advisor MASTER bus reader.


On board relays are provided to connect a door lock and a pre-warning buzzer. For high-energy locks an external 12V or 24V power supply must be connected.

### Mounting location

---

The ATS1340 PCB can be mounted in any Advisor MASTER cabinet, which supports the size B board.

Preferably, the door junction box should be mounted close to a door which needs access control and / or alarm facilities.

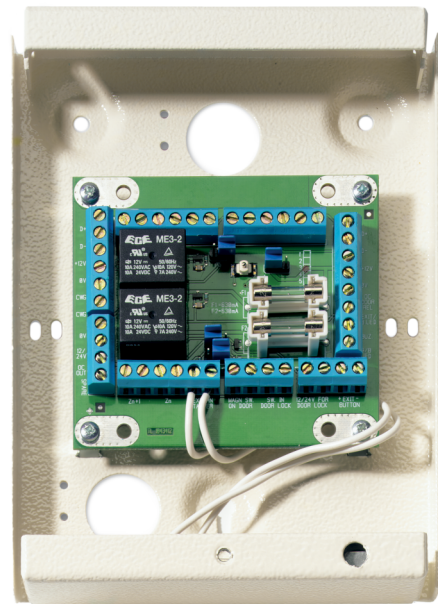

### Detalhes

---

- Universal door interface for connecting all cables in door application
- Will reduce installation time dramatically
- Connections fully attuned at the Aritech Smart card reader
- Inputs connections for door contact and door lock contact
- Dual loop resistors already provided in the input connections
- Output connections for door lock and buzzer
- All connections short circuit protected
- Maximum up to 16x ATS1340 can be connected to the bus

# ATS1340

## Caixa de Junção para Portas

### Especificações técnicas

---

#### Geral

Grupo de acessórios	Advisor Advanced, ATS Master
Tipo	Módulo

#### Elétrico

Tensão de operação	10.5 to 13.8 V (12 VDC nominal) 12 / 24 VDC (external power supply)
Consumo de corrente	0 mA standby 100 mA max. (using bus 12V power supply) 500 mA (door lock max. output current at 12 / 24 VDC)

#### Físico

Dimensões físicas	181 x 129 x 45 mm
Peso líquido	773 g

#### Ambiental

Temperatura de operação	0 to +50°C
-------------------------	------------



Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite [pt.firesecurityproducts.com](http://pt.firesecurityproducts.com) online ou contate o departamento comercial.

Last updated on 5 May 2023 - 9:31