

Eclipse 99 Alarm Control Panel

EN 50131 GRADE 3 Class I

Description


Eclipse 99 is up to 99 zone control panel appropriate for security of large commercial and office premises. The panel supports 16 independent areas (partitions) with individual programming.

Eclipse 99 has 8 physical inputs for connecting of detectors; the zone connection styles are with 1 or 2 balancing resistors or doubling zone connection. In the hardware system configuration the installer can choose among 9 connection styles in the zones. The full configuration of up to 99 zones can be realized with doubling zone connection (16 logical zones on the control PCB) and 5 Zone expanders with 8 hardware zones (80 logical zones) or without zone doubling with 11 zone expanders.

Eclipse 99 Intruder alarm control panel is certified to EN50131 GRADE 3, Class I.

Technical Specifications

Mains Supply Voltage. 230VAC \pm 10%; fuse 0.63A
 Mains Transformer. 21 VAC / 50 VA
 Back-up Battery 12V / 7 Ah
 Battery Charger. 13.8 V / 0.75A Resettable fuse
 Current consumption 100mA (of the control panel)
 Power output 13.8 V DC / 2.5A Resettable fuse
 Relay output (NO/NC). 10A@250VAC / 10A@30VDC
 Installation wires 2.5mm²
 Operating Temperature. 0°C / +50°C
 Plastic box, color ABS, white

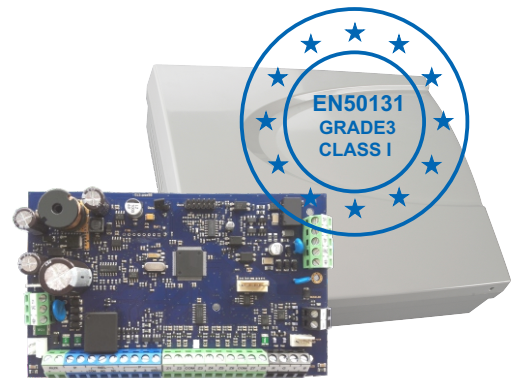

Functional Specifications

Zones. 8 on board; expandable to 99
 Balancing of zones 1 or 2 balancing resistors; doubling zone connection
 Connection styles 9 types
 Areas 16
 Outputs 5 - 3 low current (up to 100mA), 1 powerful (up to 1A), 1 relay (NO/NC)
 Two-wire fire zone Via special programming of PGM4
 Access Codes 4/6 digit; 99 user, 1 maintenance, 1 engineer
 Memory LOG. 5000 events with date and time
 Digital Communicator. 4 telephone numbers, built-in, CIA and Contact ID
 Programming 3 types - by addresses, by operations, tree structure
 Access Control via proximity readers; time slots
 Addressed devices. up to 30

Packing Information

- **Single packing box** - 1 unit Eclipse 99, dimensions 342 x 295 x 103 mm
- **Master box** - 5 units Eclipse 99, dimensions 560 x 362 x 320 mm


Contact Information

Eclipse 99

Alarm Control Panel

EN 50131
GRADE 3 Class I

● Dimensions

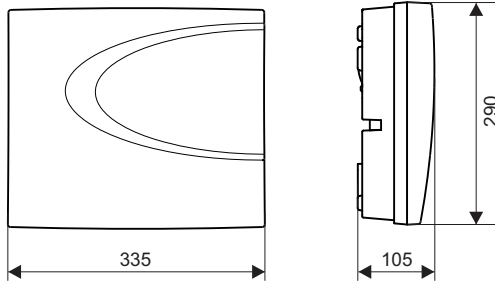

● Compatible Communication Modules

- **Eclipse VD** - Communication voice module (mounted on slot)
- **TTE GPRS Simple** - Serial communication GPRS module
- **TTE GPRS Standard** - Universal GPRS communication module
- **TTE LAN** - LAN communication module
- **TTE Combo** - Combined LAN and/or GPRS communication module
- **ARGUS** - Universal GSM communication module

● Compatible Software

- **AJAX SP** - WEB application for monitoring and control
- **ProSTE** - Specialized programming software
- **Mobile TTE** - iOS and Android smart-phone user application

● Compatible Periphery Devices

- **LED 8** - LED Keypad, recommended for user operation only
- **LED 16A** - LED Keypad, recommended for user operation only
- **LED 32** - LED Keypad, recommended for user operation only
- **LCD 32** - LCD Keypad, recommended for programming and user operation
- **LCD 32S** - LCD Keypad, recommended for programming and user operation
- **Zone 8** - Expander for 8 zones
- **PGM 8** - Expander for 8 PGM outputs
- **Eclipse WL** - Wireless expander module
- **BRAVO Series** - Wireless devices (via Eclipse WL)
- **TITAN series** - PIR detectors
- **AUMS-12S** - Magnetic contacts
- **MDU 2; MDU V** - Remote control modules
- **SR 105; SR 110** - Indoor sirens
- **SR200; SR300; SR400** - Outdoor sirens
- **SensoMAG INTR** - Fire detectors with relay base 12V
- **SensoMAG B24** - Fire base 24V (compatible with SensoMAG conventional detectors)
- **GBD10, GBD20** - Glass break detectors

● Contact Information