


R1125 Series

3/8" Diameter Stubby Press Fit with Mini-Max

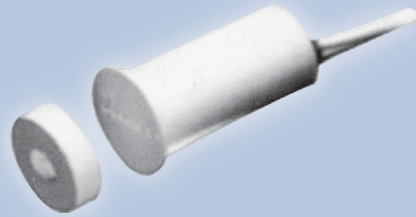

Gap Distance	Closed Loop
Regular 1/2"	R1125
Wide 7/8"	R1125W

Color	White
Quantity	10

100% **TESTED**



R1125W-N



R1125 Series

3/8" Diameter Stubby Press Fit with Mini-Max

Installation Instructions

Switch

- 1: Drill 3/4" dia. hole 1/8" deep for the contact.
- 2: Connect contact leads to security system loop and test for continuity.
- 3: Lightly coat the contact RTV mounting compound (UTC part number 1905) and insert into respective hole.

Magnet


- 1: Mount magnet to double-sided tape (included) and affix to window frame.
- 2: Or, if using stainless steel screw (included), drill 1/16" dia. (using magnet center hole as a guide) and mount using #4 x 1/2" stainless steel screw (included). Use caution if using screw other than the one provided, as it will effect the gap performance.
- 3: Care should be taken not to over tighten screw to avoid damage to magnet or stripping hole.

Recess/Flush Mount Magnet


- 1: Drill 7/16" dia. hole (standard gap) or 5/8" dia. hole (wide gap) by approximately 1/8" deep.
- 2: Coat magnet with RTV silicon adhesive and mount into hole.

NOTE: When surface mounting magnet be sure there is enough clearance to prevent the magnet from becoming damaged when closing the window or door.

Standard Gap

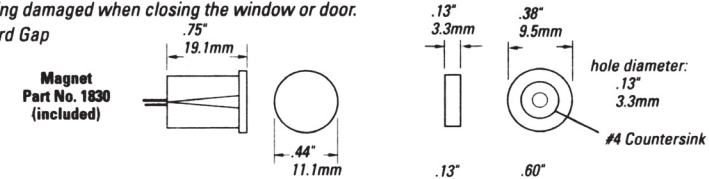

Wide Gap

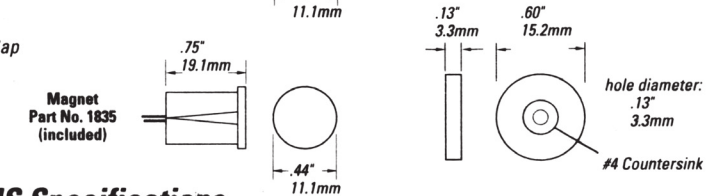

C-UL-US Specifications

Part Number	Loop Type	Electrical Configuration	Gap Distance
R1125	Closed	N.O.	1/2"
R1125W	Closed	N.O.	7/8"

** European Union Specifications: 48 V AC/DC max, 0.5 Amp

** **FORM A (R1125, R1125W)**

Voltage: 100 V AC/DC max

Current: 0.5 A max

Power: 7.5 W max

WARNING: Each electrical rating is an individual maximum and cannot be exceeded!

C-UL Specifications

Manufacturer	PLACED ON THE MARKET BY: UTC Fire & Security Americas Corporation, Inc. 3211 Progress Drive, Lincoln, NC, 28092, USA AUTHORIZED EU REPRESENTATIVE: UTC Fire & Security B.V. Kelvinstraat 7, 6003 DH Weert, Netherlands	European Union directives	UTC Fire & Security hereby declares that this device is in compliance with the applicable requirements and provisions of the Directive 2014/30/EU and/or 2014/35/EU. For more information see www.utcfireandsecurity.com or www.interlogix.com .
Product warnings and disclaimers	THESE PRODUCTS ARE INTENDED FOR SALE TO AND INSTALLATION BY QUALIFIED PROFESSIONALS. UTC FIRE & SECURITY CANNOT PROVIDE ANY ASSURANCE THAT ANY PERSON OR ENTITY BUYING ITS PRODUCTS, INCLUDING ANY "AUTHORIZED DEALER" OR "AUTHORIZED RESELLER", IS PROPERLY TRAINED OR EXPERIENCED TO CORRECTLY INSTALL FIRE AND SECURITY RELATED PRODUCTS. For more information on warranty disclaimers and product safety information, please check https://firesecurityproducts.com/policy/product-warning/ or scan the QR code.		2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info