



Product Data Sheet

DC110


Surface - overhead - floor mount contact - biased

Overhead Door Magnetic Contact

The DC110 overhead door magnetic contact is for use in the rigorous environments for commercial and industrial installations. The floor mount units are constructed with a low profile heavy cast aluminium housing. The reed switch assembly is fully encased in an exclusive polurethane potting material to prevent damage due to moisture or humidity.

Easy Installation

A wide operating gap distance makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.

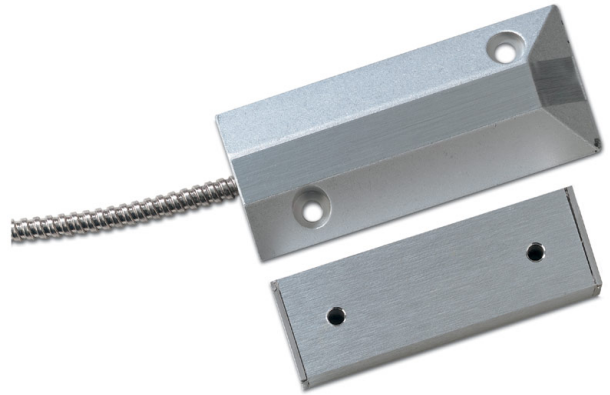

Standard Features


- Miniature, low-profile design
- Stainless steel armored cable for added security, reliability
- Small size less likely to be damaged by forlifts
- Tamper loop provided

DC110

Surface - overhead - floor mount contact - biased

Specifications

Operating gap	19 mm (min.); 63 mm (max.)
Connections (armoured cable)	5 wires, 2 m
Contact type	CO
Dimensions (W x H x D)	
Magnet	76 x 25 x 12 mm
Contact	88 x 38 x 11 mm
Material	Aluminium

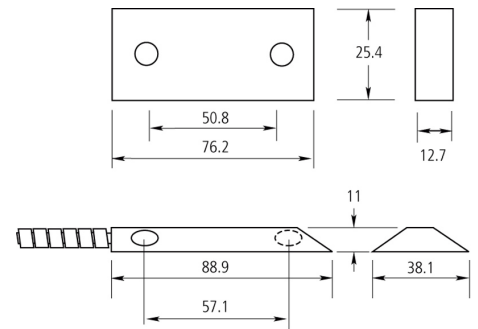

Ordering Information

Part No.	Description
DC110	Surface - overhead - floor mount contact - biased
DC1912	L Bracket for DC110, DC115, DC118