

Eye-Sight



This series is designed for security professionals and offers superior image quality, advanced AI analytics, seamless connectivity, and unparalleled insight and protection, with options and configurations to meet specific needs. The Check Point Quantum IoT Nano and DDA2 Analytics provide detailed attribute analysis and advanced threat prevention.



DPAN2-340ADRN

8MP Active Deterrence Fixed Lens Panoramic Camera with Hybrid LED and DDA2 Analytics

This Turret style Panoramic Network Camera offers a sweeping 180° view with full-color capture, even in low-light conditions. Equipped with dual lenses, this camera ensures a seamless panoramic image, reducing blind spots and enhancing coverage. The built-in Hybrid illumination of both IR and White LED which makes it perfect for monitoring both day and night and advanced DDA1 analytic together with onboard Active Deterrence make this model a perfect solution to cover most areas. The advanced technology in this camera allows it to replace multiple traditional fixed-focus cameras, delivering comprehensive security with fewer devices.

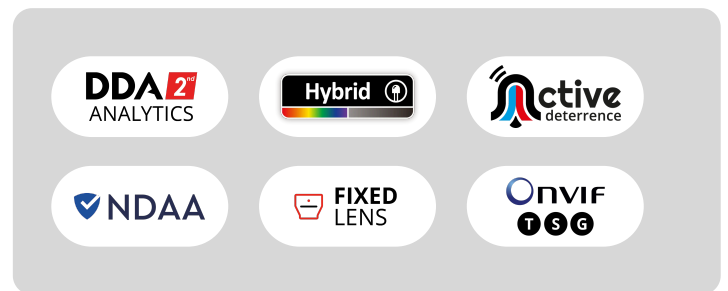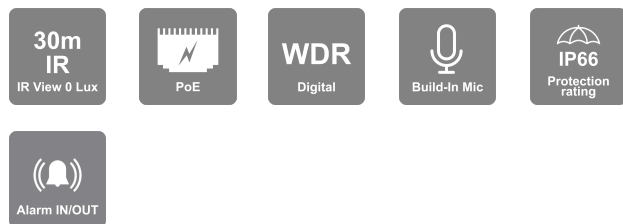

MAIN FEATURES

- DPAN2-340ADRN 8MP Active Deterrence Fixed Lens Panoramic Camera with Hybrid LED and DDA2 Analytics
- Sensor: 1/2.7" CMOS x 2
- Resolution: 4640×1760 25/30FPS (8MP)
- Lens: 2.8mm (180°) x2 ICR + 24/7 Full-Color Day Mode
- Illumination: 30m (2 High-Power IR LEDs) + 20m (2 High-Power White LEDs) + Red/Blue Strobe Light
- Compression: H.265+ / H.264+ / H.265 / H.264 / MJPEG
- General Analytics: Camera Tampering
- AI (Object Recognition): DDA Sterile Area, DDA Line Crossing, DDA Object Counting (Line), DDA Loitering Detection, DDA Illegal Parking Detection
- AI (Face Detection): 10 Faces per frame
- AI: Heatmap
- DDA2: Advanced Object Classification
- Audio Exception
- Digital WDR, BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 256GB)
- Alarm in + Alarm out
- 2X Built-in Microphone + Built In Speaker + Audio Input / Output
- ONVIF: Profile T/S/G
- Water Proof: IP66
- Weight: ~730g
- Power: DC12V/~750mA / PoE/~11W



<https://provision-isr.com>

SPECIFICATIONS

NDAA Compliant	
NDAA Compliant	Yes
Video	
Image Sensor	1/2.7" CMOS x 2
Effective Pixels	4640×1760
Electronic Shutter	1/3s ~ 1/100000s
Day & Night	ICR + 24/7 Full-Color Day Mode
Min. Illumination	Day: 0.0032 lux@ (F1.6, AGC ON) 0 lux with LED ON
Audio	
Audio compression	G.711A/G.711U
Communication	Two-Way Audio
Image	
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	Digital WDR, BLC, HLC, ROI
Noise Reduction	3D-DNR
Privacy Zone	Yes
Compression	
Resolution	8MP (4640×1760) / 6MP (3632×1632) / 4MP (3200×1200) / 2MP (2304×864) / 2048×768 / 1600×608 / 1200×448 / 960×368 / 640×240
Frame Rate	1-25/30FPS
Video Compression	H.265+/ H.264+ / H.265 / H.264 / MJPEG**
Multi-Stream	Master Stream: 8MP (4640×1760) / 6MP (3632×1632) / 4MP (3200×1200) / 2MP (2304×864) (1~30fps) Substream: 2MP (2048×768) / 1MP (1600×608) / 0.5MP (1200×448) (1~30fps) Third Stream: 1200×448/960×368/640×240 (1~30fps)
Bit Rate	128Kbps ~ 8Mbps@H.265 / 256Kbps ~ 10Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR

Lens	
Lens (Field of View)	2.8mm (180°) x2
Iris	Fixed Iris
Lens Mount	M12 Mount
Detect	60m(196ft)
Recognize	12m(39ft)
Identify	6m(20ft)

Network	
User Access	Supports simultaneous monitoring of up to 10 users with multi-stream real-time transmission
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, SNMP, 802.1X, RTSP, RTMP, RTP, Multicast, UPnP, Email, FTP, FTPS, HTTPS, QoS, P2P, HTTP POST, Auto Report
Remote Monitoring	IE Browsing (Plug-In required), Chrome/Edge/Safari/Firefox plug-in free browsing, Ossia VMS Software, Provision Cam2 Mobile App *P2P WEB connetion always requires Plugin
Ethernet	100Mbps
ONVIF	Profile T/S/G

Connectivity	
Network	RJ45 (+PoE)
Audio Connectivity	2X Built-in Microphone + Built In Speaker + Audio Input / Output
Alarm	Alarm in + Alarm out
SD Card	Event/Schedule based Main/Substream recording (Up to 256GB)
Wiegand	N/A
Power	DC Socket
Analog Video Output	No

Housing	
PoE	Yes

Illumination	30m (2 High-Power IR LEDs) 20m (2 High-Power White LEDs) Red/Blue Strobe Light
Protection Rate	Water Proof: IP66
Work Environment	-30°C~60°C, 10%~90% Humidity
Bracket	3-Axis Bracket
Dimensions	Ø111.5x102.2mm
Weight (gross)	~730g
Hard Reset Button	Yes