


DVS-IP5-4

Digital Video Server Supporting 4 Analog Technologies With Alarms

The DVS-IP5-4 supports 1 alarm inputs, 1 alarm outputs, and is compatible with TVI, AHD, and CVI cameras up to 4MP resolution. This versatile solution seamlessly integrates with external sensors for comprehensive surveillance. Ideal for both commercial and residential settings, it ensures high-quality video capture, recording, and real-time response to alarms, enhancing overall security.

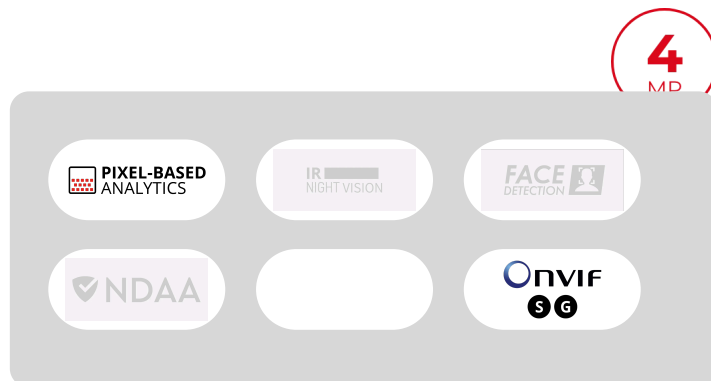

MAIN FEATURES

- DVS-IP5-4 4MP Fixed DVS Camera with
- Sensor:
- Resolution: 25/30FPS (4MP)
- Lens:
- Illumination:
- Compression: H.265 / H.264
- Camera Tampering, Line Crossing, Sterile Area, Object Monitoring
- SD Card: Event/Schedule Record (Up to 128GB)
- Alarm in + Alarm out
- Audio input + Audio output
- ONVIF: Profile S/G
- Weight: 220g
- Power: DC12V/~500mA / PoE/~5.5W



<https://provision-isr.com>

SPECIFICATIONS

NDAA Compliant	
NDAA Compliant	No
Audio	
Audio compression	G.711A/G.711U
Communication	Two-Way Audio
Events and Analytics	
Analytics	Camera Tampering, Line Crossing, Sterile Area, Object Monitoring
Motion Detection	Yes
Compression	
Resolution	4MP / 3MP / 2MP / 1MP / D1 / QVGA / CIF
Frame Rate	1-25/30FPS
Video Compression	H.265 / H.264
Multi-Stream	4MP / 3MP / 1920x1080 Substream: 1280x720 / D1 / CIF / 480x240 (1~25/30FPS)
Bit Rate	64Kbps ~ 6Mbps@H.265/H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR
Lens	
Iris	Fixed Iris
Lens Mount	M12 Mount
Network	
User Access	Supports simultaneous monitoring for up to 4 users with
Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP,
Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App
Ethernet	100Mbps

ONVIF	Profile S/G
--------------	-------------

Connectivity	
Network	RJ45 (+PoE)
Audio Connectivity	Audio input + Audio output
Alarm	Alarm in + Alarm out
SD Card	Event/Schedule based Main/Substream recording (Up to 128GB)
Wiegand	No
Power	DC Socket
Analog Video Output	CVBS (BNCx1)

Housing	
PoE	Yes
Power Supply	DC12V/~500mA / PoE/~5.5W
Work Environment	-20°C~55°C, 10%~90% Humidity
Dimensions	140mm×75mm×30mm
Weight (gross)	220g
Hard Reset Button	No