



# GFE-MCPE-C-IP67

CONVENTIONAL MANUAL CALL POINT - OUTDOOR USE

MANUAL 210729



MADE IN PORTUGAL - EU

## GLOBAL FIRE EQUIPMENT S.A.

Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL | Tel: +351 289 896 560  
Email: info@globalfire-equipment.com | Technical Support: techs@globalfire-equipment.com | [www.globalfire-equipment.com](http://www.globalfire-equipment.com)


## TECHNICAL SPECIFICATIONS

OPERATING VOLTAGE	25 (+5 ; -15) [V DC]
CURRENT CONSUMPTION - QUIESCENT	200 uA
ALARM	50 mA @ 24V DC nominal - Alarm Resistance 470 Ohms max.
CABLE SIZE	0.5-1.5mm <sup>2</sup>
TEMPERATURE - OPERATING / STORAGE	-10°C to +55°C / -30°C to +60°C
INGRESS PROTECTION GRADE	IP67 - Type A - Outdoor Use / Bucins: M20x1.5 IP65 4-9mm ( <i>recommended</i> )
MAXIMUM HUMIDITY	95% RH Non-Condensing @ 40°C
COLOUR	Red
CASE MATERIAL	ABS & Clear/ PC - Flame Retardant - Rating 94V0
DIMENSIONS - SURFACE MOUNTED	111.9 (W) x 111.9 (H) x 81.3 (D) mm
WEIGHT	262 g includes back box and fixings

*For EN54-13 compliance, please check the control panel manual specifications.*


ORDER CODE	DESCRIPTION	CERTIFICATE
GFE-MCPE-C-IP67	CONVENTIONAL MANUAL CALL POINT, IP67 - OUTDOOR USE	1328-CPR-0373

## MECHANICAL SPECIFICATION

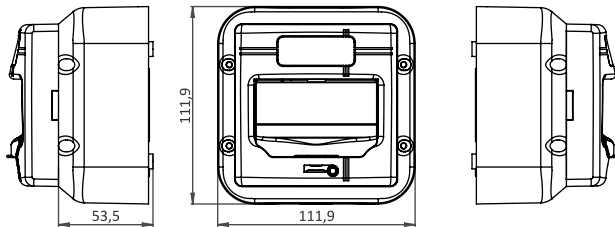

**NOTE:** All dimensions in mm


To remove  
use a **MCPE Key**  
and undo both clips  
on bottom of the  
call point.



## CONNECTIONS

**Please note that this device is polarised,**

please ensure that both zone connections, are kept on the same terminal in all the modules.  
The positive side of the zone should be connected to the RED wire and negative to the BLACK wire.

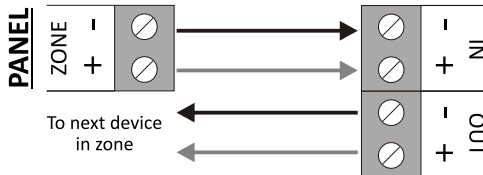

**NOTE:** Only last device in zone should have e.o.l. (end of line) fitted across OUT zone terminals.