



GFE-MCPE-C

CONVENTIONAL MANUAL CALL POINT

MANUAL 210729



MADE IN PORTUGAL - EU

GLOBAL FIRE EQUIPMENT S.A.

Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL | Tel: +351 289 896 560
Email: info@globalfire-equipment.com | Technical Support: techs@globalfire-equipment.com | www.globalfire-equipment.com


TECHNICAL SPECIFICATIONS

OPERATING VOLTAGE	25 (+5 ; -15) [V DC]
CURRENT CONSUMPTION - QUIESCENT	200 μ A
CURRENT CONSUMPTION - ALARM	50 mA @ 24 V DC nominal - Alarm Resistance 470 Ohms max.
CABLE SIZE	0.5-1.5mm ²
TEMPERATURE - OPERATION / STORAGE	-10°C to +55°C / -30°C to +60°C
INGRESS PROTECTION GRADE	IP24D - Type A - Indoor Use
COLOUR / CASE MATERIAL	Red / ABS & Clear/ PC - Flame Retardant - Rating 94 V0
MAX. HUMIDITY	95% Non-Condensing @ 40°C
WEIGHT	152 g includes back box and fixings
DIMENSIONS - SURFACE MOUNTED	92.6 (W) x 92.6 (H) x 60.1 (D) mm
DIMENSIONS - FLUSH MOUNTED	92.6 (W) x 92.6 (H) x 27.8 (D) mm

For EN54-13 compliance, please check the control panel manual specifications.


ORDER CODE	DESCRIPTION	CERTIFICATE
GFE-MCPE-C	CONVENTIONAL MANUAL CALL POINT	1328-CPR-0377

MECHANICAL SPECIFICATION

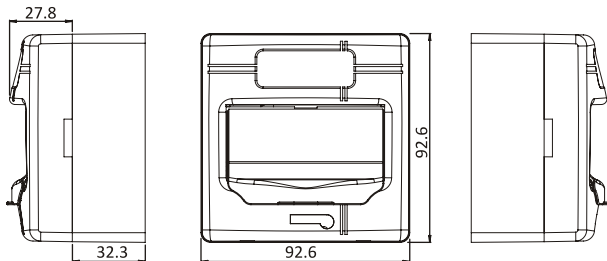

NOTE: All dimensions in mm


To remove
use a **MCPE Key**
and undo both clips
on bottom of the
call point.



CONNECTIONS

Please note that this device is polarised,

please ensure that both zone connections, are kept on the same terminal in all the modules.
The positive side of the zone should be connected to the RED wire and negative to the BLACK wire.

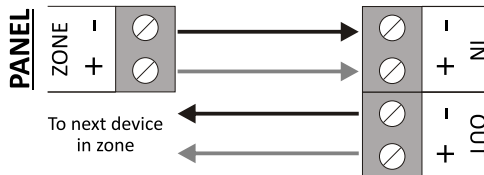

NOTE: Only last device in zone should have e.o.l. (end of line) fitted across OUT zone terminals.