
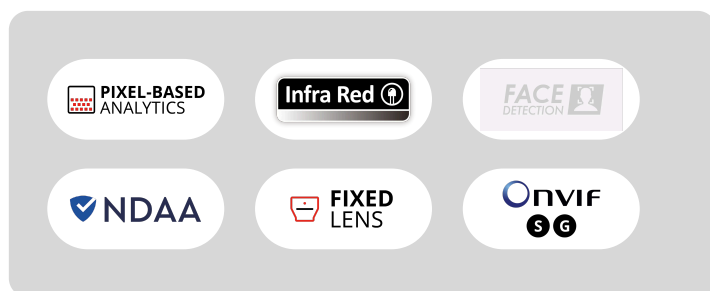


This series simplifies surveillance with high-quality images and enhanced night vision capabilities. Powered by AI (DDA™ Video Analytics and Face Recognition) and equipped with Check Point protection for comprehensive monitoring. Choose from rainbow cameras, Motorized Varifocal options, and Anti-Vandal designs for high-security areas.

IV-320IPSN-37

10m IR 2MP Pinhole Dummy PIR Hidden Camera

This dummy PIR 2MP camera is designed to cover the need for concealed cameras; It covers short-distance surveillance (up to 10m) for indoor scenarios. With its excellent performance, reliability, and affordable price, the IV-320IPSN-37 camera is the perfect solution for concealed installations.

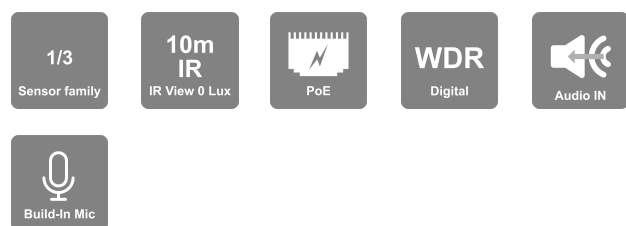

MAIN FEATURES

- IV-320IPSN-37 2MP Fixed IV Camera with IR LED
- Sensor: 1/2.8" CMOS (16:9)
- Resolution: 1920×1080 25/30FPS (2MP)
- Lens: 3.7mm (83°)
- True Day&Night – ICR
- Illumination: 10m (20 invisible IR LED)
- Compression: H.265 / H.264 / MJPEG
- General Analytics: Camera Tampering
- Standard Analytics (Pixel-Based): Line Crossing, Sterile Area
- DWDR, BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 128Gb)
- Built-in Microphone + Audio input
- ONVIF: Profile S/G
- None
- Weight: 269g
- Power: DC12V/~420mA / PoE/~4.8W



<https://provision-isr.com>

SPECIFICATIONS

| 3rd Party Cyber Protection | |
|----------------------------|---|
| General | N/A |
| Protection Methods | N/A |
| NDAA Compliant | |
| NDAA Compliant | Yes |
| Video | |
| Image Sensor | 1/2.8" CMOS (16:9) |
| Effective Pixels | 1920x1080 |
| Electronic Shutter | 1/25s ~ 1/100000s |
| Day & Night | ICR |
| Min. Illumination | Day: 0.1lux / Night: 0.007 lux@F2.0,AGC on; 0 lux with IR on |
| Audio | |
| Audio compression | G.711A/G.711U |
| Communication | One-Way Audio |
| Image | |
| Image Settings | AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable |
| Image Enhancement | DWDR, BLC, HLC, ROI |
| Noise Reduction | 3D-DNR |
| Image Orientation | Mirror/Flip |
| Privacy Zone | Yes |
| Events and Analytics | |
| Analytics | General Analytics: Camera Tampering Standard Analytics (Pixel-Based): Line Crossing, Sterile Area |
| Motion Detection | Yes |
| Compression | |

| | |
|--------------------------|--|
| Resolution | 2MP / 1MP / D1 (704x576) / QVGA (480x240) / CIF (352x288) |
| Frame Rate | 1-25/30FPS |
| Video Compression | H.265 / H.264 / MJPEG** |
| Multi-Stream | Master Stream: 2MP (1920x1080) / 1MP (1280x720) (1~30fps) Substream: QVGA/D1/CIF (1~30fps) |
| Bit Rate | 64Kbps ~ 4Mbps@H.265 / 64Kbps ~ 6Mbps@H.264 |
| Encode Mode | VBR/CBR |
| Image Quality | Five levels under VBR; Free adjustment under CBR |

| Lens | |
|-----------------------------|-------------|
| Lens (Field of View) | 3.7mm (83°) |
| Iris | Fixed Iris |
| Lens Mount | M12 Mount |

| Network | |
|--------------------------|---|
| User Access | Supports simultaneous monitoring of up to 3 users with multi-stream real-time transmission |
| Network Protocol | IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS, P2P |
| Remote Monitoring | IE Browsing (Plug-In required), Chrome/Edge/Safari/Firefox plug-in free browsing, Ossia VMS Software, Provision Cam2 Mobile App |
| Ethernet | 100Mbps |
| ONVIF | Profile S/G |

| Connectivity | |
|---------------------------|---|
| Network | RJ45 (+PoE) |
| Audio Connectivity | Built-in Microphone + Audio input |
| Alarm | No |
| SD Card | Event/Schedule based Main/Substream recording (Up to 128Gb) |
| Wiegand | No |

| | |
|---------------------|------------------------------|
| Power | DC Socket |
| Analog Video Output | No |
| Housing | |
| PoE | Yes |
| Illumination | 10m (20 invisible IR LED) |
| Power Supply | DC12V/~420mA / PoE/~4.8W |
| Protection Rate | None |
| Work Environment | -20°C~50°C, 10%~90% Humidity |
| Bracket | 3-Axis Bracket |
| Dimensions | 95x69.5x58mm |
| Weight (gross) | 269g |
| Hard Reset Button | No |

DIMENSIONS

