


LENX

LX-A-B5IR2836

5 MP Bullet Camera

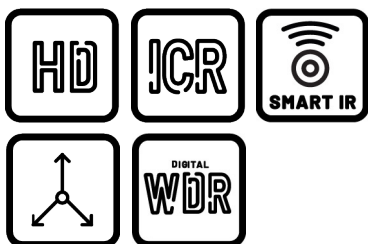

- 5 MP high performance COMS
- 2560 × 1944 resolution
- 2.8 mm, 3.6 mm fixed lens
- EXIR 2.0, smart IR, up to 20 m IR distance
- OSD menu, 2D DNR, DWDR
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the coax (Lenx-C)

Modelo disponível:

LX-A-B5IR28 (2.8 mm fixed lens)

LX-A-B5IR36 (3.6 mm fixed lens)

LENX

SPECIFICATION




Model	LX-A-B5IR28		LX-A-B5IR36
Camera			
Image Sensor	5 MP CMOS image sensor		
Resolution	2560 (H) × 1944 (V)		
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR		
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s		
Lens	2.8 mm fixed focal lens	3.6 mm fixed focal lens	
Horizontal Field of View	85.5°	80.1°	
Lens Mount	M12		
Day & Night	IR cut filter		
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360°		
Synchronization	Internal synchronization		
Frame Rate	PAL: 5 MP@20fps, 4 MP@25fps, 1080p@25fps NTSC: 5 MP@20fps, 4 MP@30fps, 1080p@30fps		
Menu			
AGC	Support		
D/N Mode	Auto/Color/BW (Black and White)		
White Balance	ATW/MWB		
BLC	Support		
DWDR (Digital Wide Dynamic Range)	Support		
Language	English		
Functions	Brightness, Sharpness, DNR , Mirror, Smart IR		
Interface			
Video Output	1 HD analog output		
Switch Button	TVI/AHD/CVI/CVBS		
General			
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)		
Power Supply	12 VDC ±25%		
Power Consumption	Max. 4.3 W		
Protection Level	IP67		
Material	Metal		
IR Range	Up to 20 m		
Communication	Up the coax, Protocol: Lenx-C (TVI output)		
Dimensions	58 mm × 61 mm × 163 mm (2.28" × 2.40" × 6.42")		
Weight	Approx. 335 g (0.74 lb.)		

LENX


www.lenxvideo.com

LENX

DIMENSION

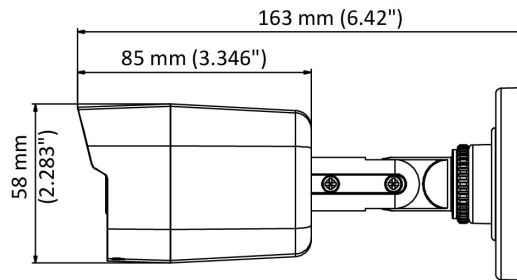

ACCESSORY



LX-1280ZJ-XS
Junction Box