



NVR8-32800F-16P(2U)

32CH 8MP Face Recognition PoE NVR with alarms

Provision-ISR NVR8-32800F-16P(2U) is a high performance network video recorder with integrated 16 channel PoE switch for high-definition surveillance. The device features 16 alarm inputs + 1 alarm outputs and supports both Face Recognition and Advanced Video Analytics (DDA). This easy-to-install solution is suitable for big-sized installations (up to 32 channels) and provides you with everything you need for a trouble-free CCTV project.

32
CH

8
MP

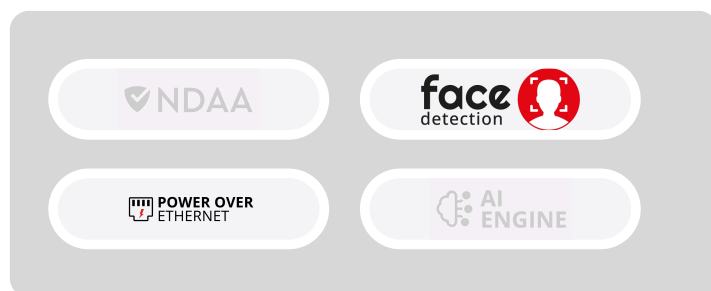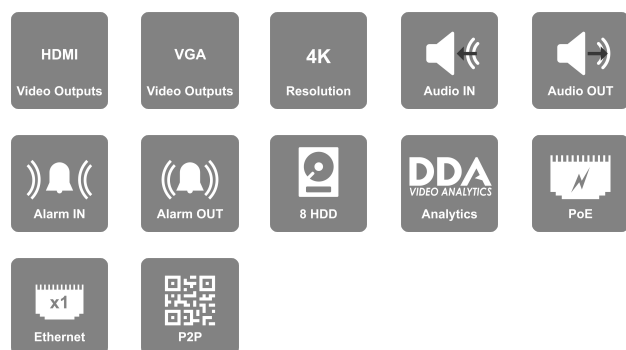

MAIN FEATURES

Video:

- Input: 32 Channel Support
- 32 Channel PoE / Standard Network Connection (Via 32 x RJ-45 / Network)
- -16 Channel Standard Connection (Via RJ-45 Network Port)
- Output: HDMI (4K@60Hz, 4K@30Hz, 1080P), VGA (1080P, 1280x1024, 1024x768)

Bandwidth:

- Incoming: 256Mbps
- Outgoing: 256Mbps

Decoding Support:

- H.265S/H.265+/H.265/H264

Analytics:

- Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, Smart Search, LPR, Thermal Loitering Detection, Illegal Parking, Audio Exception

Recording:

- 32CH 8MP Real-Time
- FPS: 800 (PAL) / 960 (NTSC)

Playback:

- Local: 16Ch Simultaneously
- Remote: 32Ch Simultaneously

Audio:

- Input: 1CH + IPC Inputs
- Output: 1CH + IPC Output
- 2 Way Audio

Alarm:

- Input: 16+IPC
- Output: 1+IPC

Storage:

- 8 x SATA (Up to 10TB each)
- 1 x E-SATA (Up to 10TB each)

USB Port:

- 1 USB 2.0 Port + 1 USB 3.0 Port

Network:

- 1 x RJ-45: 10/100/1000Mbps Each

Remarks:

- The following features are based on firmware v1410_71384 and are subject to firmware version changes.



SPECIFICATIONS

3rd Party Cyber Protection	
General	N/A
Protection Methods	N/A
NDAA Compliant	
NDAA Compliant	No
Video	
Video Input	32Ch Over Network (Out of which up to 16Ch PoE Direct Connection)
Output	HDMI (4K@60Hz, 4K@30Hz, 1080P), VGA (1080P, 1280x1024, 1024x768)
View Mode	Independent* (When enabled, NVR based analytics are disabled)
Fish-Eye Dewarp	Local + Web
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch – 8MP ; 4Ch – 2x8MP + 2x5MP ; 9/16Ch – 1MP ; 32Ch – D1
Audio	
Audio-specs-Input	1CH RCA (Linear, 1kΩ) + IPC Inputs
audio-specs-Output	1CH RCA (2.0 Vp-p, 1 kΩ) + IPC Outputs
Compression	G.711A/G.711U
Two Way Audio	Yes
Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, Smart Search, LPR, Thermal Loitering Detection, Illegal Parking, Audio Exception
Analytics Channels (IPC Based)	32Ch (Requires supporting IPC)
Analytic Channels (NVR Based)	N/A
Face Recognition Rate	180 Faces per minute (All Channels) / 3 Faces per second (Single Channel)
Bandwidth	
Incoming	256Mbps

Outgoing	256Mbps
Record/ Main Stream	
Real-Time Recording	32CH 8MP Real-Time
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
16MP	N/A
12MP	N/A
8MP	960FPS(NTSC)/800FPS(PAL)
5MP and lower	960FPS(NTSC)/800FPS(PAL)
Master stream over network	Up to 32CH@Recording Resolution
Substream	
Resolution substream	Depends on IPC
Remote view	
Max Channel View	160Ch (Limited to Outgoing Bandwidth Capacity)
Remote Applications	
User Access	10 Users Online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback)
Plug-in based Web-Browser	Internet Explorer
Playback	
Local	16Ch
Remote	32Ch

Search Mode	DDA Object, Smart Search, LPR, Face Recognition, Time-Slice, Time, Event, POS
--------------------	---

Backup	
USB	1 USB 2.0 Port + 1 USB 3.0 Port
Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)

Alarm	
Alarm-in	16+IPC
Alarm-out	1+IPC

Storage	
HDD	8
E-Sata Support	1
RAID	N/A

PTZ	
Connection	Via Network
Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
RS-485	Yes (C06 Keyboard Connection)

Network	
Ethernet	1000/100/10Mbps self-adaptive Ethernet interface
Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report (Ossia VMS)
ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)

PoE	
PoE Ports	16xRJ45
Speed	10/100Mbps (10Mbps Under CCTV Mode)
Standard	PoE (IEEE802.3AF/AT)

NVR8-32800F-16P(2U)



CCTV Mode	Yes (Up to 200m and 10Mbps bandwidth)
Total Power	240W (Avarage 15W Per Channel)
Max. Power Output (Per Ch.)	~25.5W
Others	
Power Supply	AC100-240V
Power consumption (No HDD)	15W
Dimension	W430xD445xH97mm
Operation Temperature	0°C~50°C

DIMENSIONS

