



VALKYRIE CB

CONVENTIONAL VISUAL INDICATING DEVICE - VID



MADE IN PORTUGAL - EU

GLOBAL FIRE EQUIPMENT S.A.

Parque Industrial Municipal da Barracha, 8150-017 São Brás de Alportel - PORTUGAL | Tel: +351 289 896 560
Email: info@globalfire-equipment.com | Technical Support: techs@globalfire-equipment.com | www.globalfire-equipment.com


TECHNICAL SPECIFICATIONS

SUPPLY VOLTAGE	20V to 30V DC
LOOP CURRENT - ALARM BEACON	3 mA Max.
MAX. CABLE SIZE	2.5 mm ²
OPERATING TEMPERATURE	-10°C to 55°C
COLOUR / CASE MATERIAL	Red or White / ABS
MAX. HUMIDITY / PROTECTION	95% RH Non-Condensing / IP44 - Type A - Indoor Use
DIMENSIONS / WEIGHT	110 (D) x 49,5 (H) mm / 150g inc. beacon base - 180g inc. packaging


ORDER CODE

VALKYRIE CB	CONVENTIONAL VISUAL INDICATING DEVICE - VID
--------------------	---

BASE LOCK




To lock beacon remove pin available at terminal 4 on the underside of the beacon using a small screwdriver.



To unlock beacon from its base push provided unlock key through hole available on the base side wall as shown.

CONNECTIONS

Please note that this device is polarised.

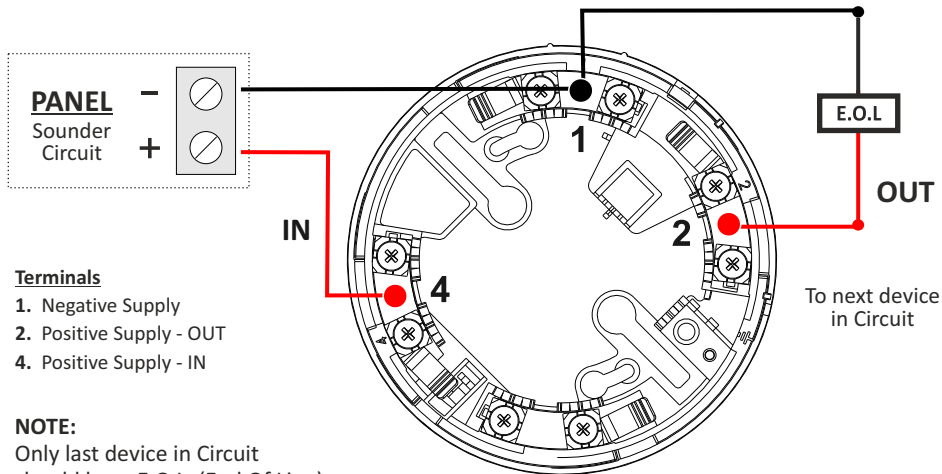

Terminals

1. Negative Supply
2. Positive Supply - OUT
3. Positive Supply - IN
4. Positive Supply - IN

NOTE:

Only last device in Circuit should have E.O.L. (End Of Line) fitted across + and - terminals.