



# VALKYRIE CB IP65

## CONVENTIONAL WALL BEACON OUTDOOR USE-IP65

MADE IN PORTUGAL - EU

### GLOBAL FIRE EQUIPMENT S.A.

Parque Industrial Municipal da Barracha, 8150-017 São Brás de Alportel - PORTUGAL | Tel: +351 289 896 560  
Email: info@globalfire-equipment.com | Technical Support: techs@globalfire-equipment.com | www.globalfire-equipment.com

### TECHNICAL SPECIFICATIONS

SUPPLY VOLTAGE	20 V to 30 V DC
CURRENT - SOUNDER/BEACON ACTIVE	10 mA, 280 mW @ 28 V
CABLE SIZE	0.5-2.5 mm <sup>2</sup>
RESET/STAR-UP TIMES	20 seconds max.
PROTECTION CATEGORY	Type B - Outdoor Use - Rating IP65
COLOUR / CASE MATERIAL	Red / ABS
OPER. TEMPERATURE / MAX. HUMIDITY	-25°C to 70°C / 95% RH Non-Condensing
DIMENSIONS / WEIGHT	112 (D) x 82 (H) mm / 205 g - 240 g including packaging

*For EN54-13 compliance, please check the control panel manual specifications.*


### ORDER CODE

**VALKYRIE CB IP65**

### DESCRIPTION


CONVENTIONAL WALL MOUNTED BEACON - IP65 RATED

### MECHANICAL SPECIFICATION



## BEACON TERMINAL CONNECTIONS

*Please note that this device is polarised.*

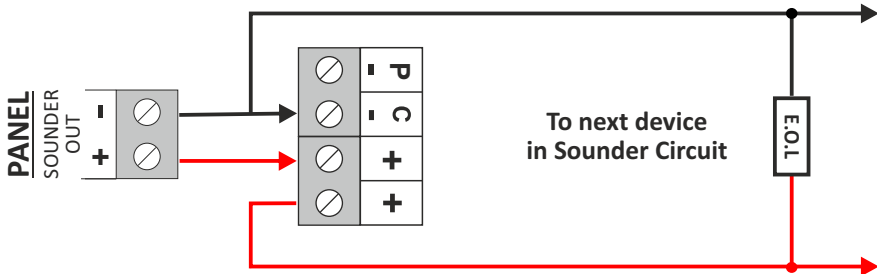

### Terminals

C- Negative Supply Continuous

+ Positive Supply - IN

### **NOTE**

Only last device in Sounder Circuit should have e.o.l. (end of line) fitted across + and - terminals.