

# ZP1-X3E-21

## Enhanced Conventional Fire and Extinguishing Panel - 3 Zone - Portuguese, Portugal

### Overview

ZP1 fire control panels offer state of the art architecture in configurations that deliver an uncomplicated solution for small to mid-sized conventional applications. They feature an attractive contemporary design that fits with any decor. The gently curved door front offers a distinctive flair. Operator controls are inset in a striking blue lexan.

With support for multiple lines of conventional detectors and accessories, these quick-to-configure systems offer versatility that benefits building owners and installation/maintenance companies alike.

### The Panel

The ZP1-X3E is a networkable, enhanced conventional fire alarm and extinguishing control panel. It is supplied in local language with 3 fire zones that support up to 32 devices per zone. These zones may be configured for extinguishing in single zone or double zone configuration in any combination of zones. In addition the panel offers supervised outputs for first stage notification, second stage notification as well as optical warning indicators and actuator activation. Standard relay outputs are provided for EN54 compliance and system status notification, as well as multiple inputs for system control.

### Options

The panels support 2 types of auxiliary relay boards, one with 4 standard relays, and one with 4 supervised relays. With these boards the panel outputs may be expanded with up to 16 additional outputs. The ZP1-X3E supports class A (redundant ring) and B (standard bus) networking with up to 32 nodes including conventional and addressable panels and repeaters via an optional network interface. This allows full remote control and inputs to and from other nodes in the system, providing superior flexibility in system organisation and planning.

### Approvals & Compliance

The product line carries the following accreditations:

- EN54:2, EN54:4 and CE approved
- CPR certified
- EN12094-1 certified
- WEEE compliant
- RoHS compliant



### Details

- Modern, elegant design
- Easy removable parts for quick and easy installation
- Normal & head-out supervision support per zone
- Three detection zones
- Single zone, double zone or any combination of zones configurable for release
- 6 Pre-configured relays and 8 supervised inputs for extinguishing control
- Configurable fire routing, sounder, extinguishing, reset and door monitoring delays
- Configurable "Hold Mode" type-A or type-B
- Sounders configurable for pulsing or continuous operation
- Extinguishing agent flow confirmation
- Continuous or resettable 24 VDC auxiliary supply
- Auxiliary standard & supervised relay output support
- Default support for special functions such as: - EN54 compliant user access levels - Basic & Advanced level configuration - mixed zones - front panel diagnostics with test & disable control - one-man walk test
- Redundant networking to ZP1 conventional and ZP2 addressable nodes
- Intrinsically safe and EN54-13 zone support

# ZP1-X3E-21

## Enhanced Conventional Fire and Extinguishing Panel - 3 Zone - Portuguese, Portugal

### Technical specifications

#### Electrical

Power supply type	VAC
Operating voltage	110 VAC @ 50 Hz or 230 VAC @ 50 Hz (+10% -15%)
Current consumption	3.15 A @ 110/1.5 A @ 240 VAC

#### Loop

Quantity	3
----------	---

#### Zone

Quantity of devices per zone	32 max.
------------------------------	---------

#### Standby battery

Capacity	2 x 12V 12 Ah (SLA)
----------	---------------------

#### Physical

Physical dimensions	440 x 480 x 140 mm (W x H x D)
Net weight	3.9 kg (without battery)
Shipping weight	5 kg
Colour	Grey (RAL 7035)
Mounting type	Surface Mount
Cable entries	Ø 20 mm - 14 / 2 / 12 (Top/Bottom/Rear)

#### Environmental

Operating temperature	-5 to +40°C
Storage temperature	-20 to +70°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor
IP rating	IP30
Storage temperature	-20 to +70°C
Operating temperature	-5 to +40°C
Relative humidity (noncondensing)	10 to 95%
IP Rating	IP30

#### Standards & regulation

Certification	EN12094-1, EN54-2, EN54-4
Standards	EN54-2, EN54-4, EN12094-1
Environmental	CPD, WEEE, RoHS

#### Input Supply

	110 VAC/60 Hz or 240 VAC/50 Hz
Tolerance	+10% / -15%
Current consumption (max)	3.15 A @ 110/1.5 A @ 240 VAC
Cable specification	3 x 1.5 mm <sup>2</sup> (live, neutral, earth)

#### Batteries

	2 x 12V 12 Ah (SLA)
--	---------------------

#### Panel Supply

	4A @ 24 VDC
Quiescent current (no devices)	0.39 A
Alarm current (no devices)	2.78 A

#### Zones

	3
Output voltage	22 VDC (18-24 VDC)
Load (max)	65 mA
Cable resistance (max)	40 ohm
Cable capacitance (max)	500 nF
Devices per zone (max)	32

#### Supervised Inputs

	6
Use	MCP Start, MCP Hold, MCP Abort, Pressure Switch, Gas Flow, Door Monitor

#### Non Supervised Inputs

	2
Use	Auto/Manual mode, Remote Reset

#### Supervised Outputs

	4
Use	Fire Sounders, Extinguishing Sounders, Optical Indications, Actuator
Notification	2 x 500 mA @ 24 VDC
Visual indicators	1 x 500 mA @ 24 VDC
Actuator	1 x 1A @ 24 VDC

#### Non Supervised Outputs

	4
Use	Hold Mode, Abort Mode, Manual Mode, Release Indication
Specification	6 x 2 A @ 30 V

#### Auxilliary Supply Output


Output voltage	24 VDC (21-28 VDC)
Load (max)	250 mA

#### Mechanical

Size (h x w x d)	480 x 440 x 140 mm
Weight (without batteries)	3.9 kg
Colour	RAL7035
Cable entry (top / bottom / rear)	Ø 20 mm - 20 / 2 / 26

# ZP1-X3E-21

## Enhanced Conventional Fire and Extinguishing Panel - 3 Zone - Portuguese, Portugal

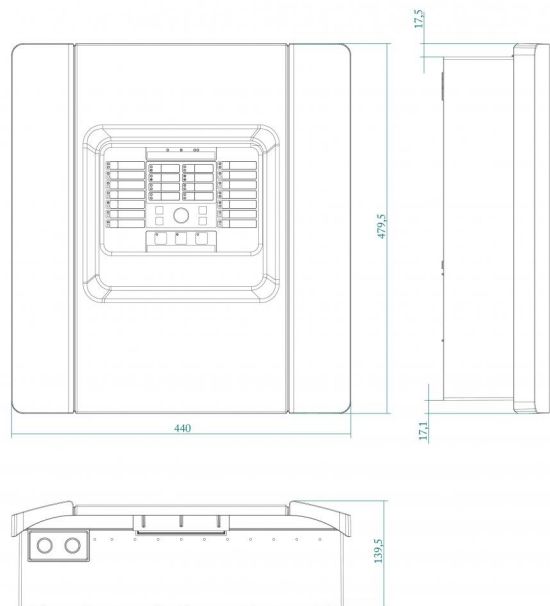

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

8 March 2019 - 13:06